


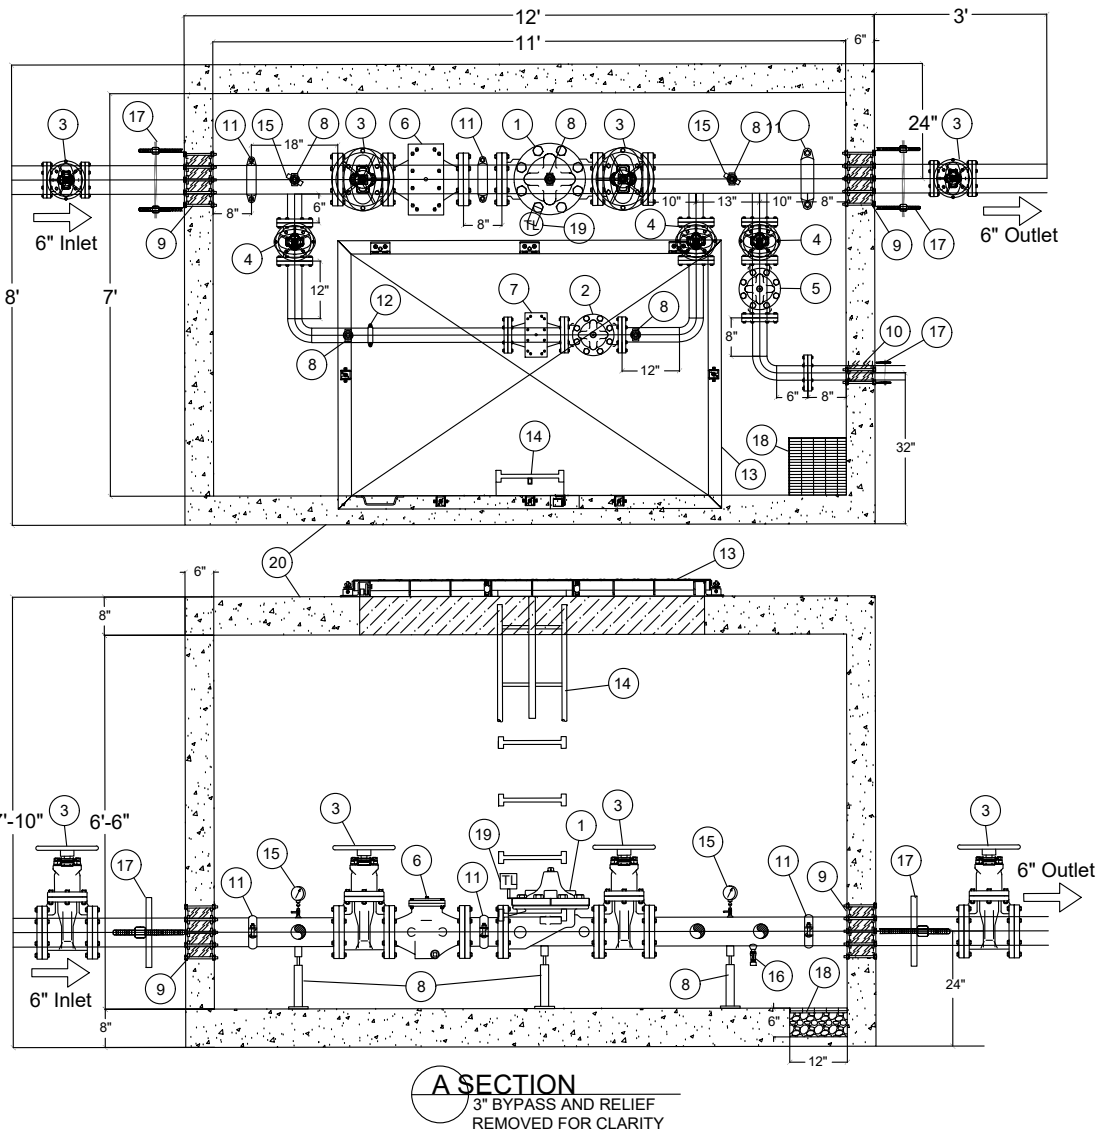

BILL OF MATERIALS

ITEM	QTY	DESCRIPTION
1	1	6" CLA-VAL 90G-01YBCSVKC PSI REDUCING VALVE D.I. SST. TRIM 150 FLG EPOXY COATED W/ X101 INDICATOR SST. FITTINGS POLY TUBING
2	1	3" CAL-VAL 90G-01YBCSVKC PSI REDUCING VALVE D.I.SST. TRIM 150 FLG EPOXY COATED W/ X101 INDICATOR SST. FITTINGS POLY TUBING
3	2	6" Mueller 350 psi Resilient Wedge A-2361 Gate Valve 150 FLXFL NRS W/ HAND WHEEL
4	3	3" Mueller 350 psi Resilient Wedge A-2361 Gate Valve 150 FLXFL NRS W/ HAND WHEEL
5	1	3" CLA-VAL 50G-01BV PSI RELIEF D.I.SST TRIM EPOXY COATED POSITION INDICATOR 150LB FLANGES SST. FITTINGS POLY TUBING
6	1	6" CLA-VAL X43H H-STYLE STRAINER 150 NSF/ANSI 61 FUSION BONDED EPOXY COATING
7	1	3" CLA-VAL X43H H-STYLE STRAINER 150 NSF/ANSI 61 FUSION BONDED EPOXY COATING
8	5	STANDON ADJUSTABLE PIPE SUPPORTS
9	2	6" LINK-SEAL LS475 ASSEMBLY
10	1	3" LINK-SEAL LS340 ASSEMBLY
11	3	6" VICTAULIC STYLE 107V QUICKVIC RIGID COUPLING
12	1	3" VICTAULIC STYLE 107V QUICKVIC RIGID COUPLING
13	1	48" X 72" EAST JORDAN FLOOD TIGHT ALUMINUM HATCH PRODUCT # - H48722601
14	1	HALLIDAY PRODUCTS ALUMINUM LADDER L1B OR L1D W/ L1E LADDER EXTENSION OR APPROVED EQUAL
15	2	2 1/2" 0-300 PSI GAUGE LIQUID FILLED W/4 SST. ISOLATION VALVE
16	1	SST. BALL VALVE FOR WATER SUPPLY
17	3	ROMAC 600 SERIES SPLIT PIPE RESTRAINT
18	1	12"L X 12"W X 6"D SUMP W/ GRATE
19	1	TECHNOLOG CELLO 4S MONITORING: DUAL PRESSURE
20	1	PRESTIGE WWT 6" WALLED H2O RATED PRV VAULT. SHERMAN WILLIAMS TARLOCK ON OUTSIDE OF VAULT. UGL DRY LOCK SEALANT ON INSIDE OF VAULT. OD: 12' L x 8' W x 7'10" T ID: 11' L x 7' W x 6'6" T

NOTES:

- ALL PIPING AND EQUIPMENT SUPPLIED BY PRESTIGE WORLDWIDE TECHNOLOGIES. ALL PIPING IS SCHEDULE 40 304 SST.
- THIS IS AN EXAMPLE OF A 6" PRV WITH A 3" BYPASS, OTHER SIZES ARE AVAILABLE.

Date:
November 2022



2355 Trane Rd.
Bullhead City, AZ. 86442
(928) 763-9400

PRESSURE REDUCING VALVE (PRV) VAULT

Detail No.
346